


**UNITED
APPLIANCES**
HEATING & COOLING AIR CONDITIONING



HIGH EFFICIENCY
DUCTLESS
ULTRA COMFORT

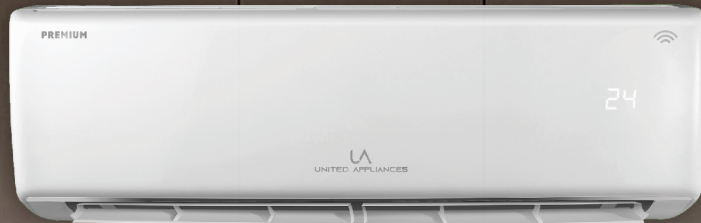

100% WIFI




EFFICIENCY & TECHNOLOGY

PREMIUM SERIES



**UNITED
APPLIANCES**
HEATING & COOLING AIR CONDITIONING

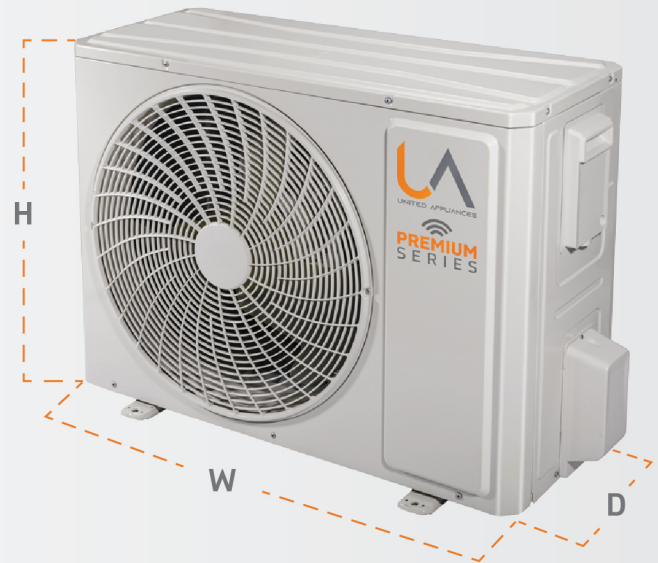

DEHUMIDIFICATION



I FEEL



SELF DIAGNOSIS



SLEEP FUNCTION



BLUE FIN



TECHNICAL SPECIFICATION | PREMIUM SERIES

DESCRIPTION	UNIT	12K BTU/h 115V	12K BTU/h 220V	18K BTU/h 220V	24K BTU/h 220V	30K BTU/h 220V	36K BTU/h 220V
		UAWH12-AD3D1	UAWH12-DD3D1	UAWH18-DD3D1	UAWH24-DD3D1	UAWH30-DD3D1	UAWH36-DD3D1
RATED VOLTAGE	V~	115	208/230	208/230	208/230	208/230	208/230
SEER	SEER2	16.5	16.5	16	18	20	20
COOLING CAPACITY	BTU/h	13,307	13,307	19,278	25,249	35,500	37,200
HEATING CAPACITY	BTU/h	15,012.8	13,648	22,519	26,614	36,850	38,500
COOLING POWER INPUT	W	1,345	1,345	1,820	1,896	2,667	3,200
HEATING POWER INPUT	W	1,082	1,082	1,866	2,051	2,588	3,200
COOLING CURRENT	A	14.6	6.0	8.1	8.5	12	14
HEATING CURRENT	A	11.8	4.8	8.2	9.5	11.5	14
REFRIGERANT	R	R410A	R410A	R410A	R410A	R410A	R410A
REFRIGERANT CHARGE	oz	24.696	27.518	42.4	52.9	74.1	84.7
IDU SOUND POWER LEVEL	dB	49/39/52	55/47/40	57/51/44	61/52/47	66/55/47	66/55/47
ODU SOUND POWER LEVEL	dB	62	62	67	67	72	72
DIMENSION IDU (WxHxD)	in	33 17/64x11 3/8x8 15/64	33 17/64x11 3/8x8 15/64	38 13/64x11 53/64x8 55/64	42 29/64x12 53/64x9 44/64	53 10/64x12 53/64x9 61/64	53 10/64x12 53/64x9 61/64
DIMENSION ODU (WxHxD)	in	28 13/16x21 21/32x12 63/64	28 13/16x21 21/32x12 63/64	31 37/64x21 54/64x13 50/64	37 49/64x25 63/64x15 53/64	39 24/64x29 24/64x16 52/64	39 24/64x29 24/64x16 52/64
IDU NET WEIGHT	lb	22	22	29.8	34.2	44.1	44.1
ODU NET WEIGHT	lb	58.433	56.228	69.5	97	113.6	127.9